

LAMPIRAN




















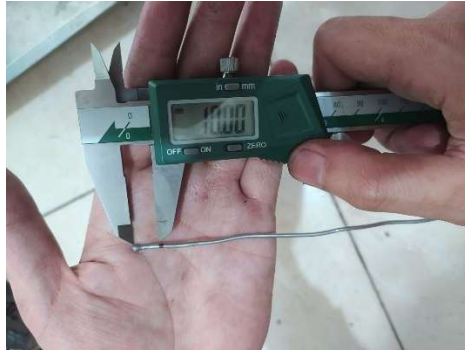









Data hasil penelitian yang dicatat adalah nilai tekanan refrigerant (P_1 , P_2 , P_3 dan P_4) dan suhu refrigerant (T_1 , T_2 , T_3 , dan T_4).

Variabel	P_1 (Psi)	T_1 (°C)	P_2 (Psi)	T_2 (°C)	P_3 (Psi)	T_3 (°C)	P_4 (Psi)	T_4 (°C)	$\dot{m}$
Sensor Menempel Rpm : 1000	35	-3	276	72	272	63	35	-6	0,403
Sensor Menempel Rpm : 1200	32	-5	305	75	300	66	32	-8	0,403
Sensor Menempel Rpm : 1400	27	-6	319	77	315	68	27	-10	0,403
Sensor Kedalaman 1 cm Rpm : 1000	45	6,7	175	50	170	44	45	2,6	0,403
Sensor Kedalaman 1 cm Rpm : 1200	44	6,6	182	52	177	46	44	2,5	0,403
Sensor Kedalaman 1 cm Rpm : 1400	43	6,5	189	56	184	50	43	2,3	0,403
Sensor Kedalaman 2 cm Rpm : 1000	52	7,7	150	48	145	40	52	3,2	0,403
Sensor Kedalaman 2 cm Rpm : 1200	50	7,5	170	49	165	41	50	3	0,403
Sensor Kedalaman 2 cm Rpm : 1400	49	7,3	180	50	175	43	49	2,9	0,403

Mengetahui



Adi Indra Setiawan
(Leader Service)